

Electrical Data


Frequency:	806-960/1710-2700 MHZ
Gain:	3 dBi
VSWR:	<1.5:1
Polarization:	Vertical
Horizontal Beamwidth :	360°
Vertical Beamwidth:	68°
Nominal Impedance:	50 Ohms
Max Input Power:	100 W
Lightning Protection:	DC Ground

Mechanical Data


Connector :	N Female
Dimensions:	Ø165*90mm
(diameter*length)	Ø6.5*3.54in
Weight:	0.29kg/0.64lb
Cable Length:	350mm
Reflector Material:	Aluminum Alloy
Radome Material:	Weatherproof ABS
Mounting Method:	Fit with nut
Rated Wind Velocity:	210km/h
Operating temperature:	-40~+65°C

Shipment Data

Packing Qty:	20pcs/Carton
Carton Size:	720*300*330mm
(length*width*height)	28.3*11.8*13.0in
Packing Weight:	7kg/15.42lb

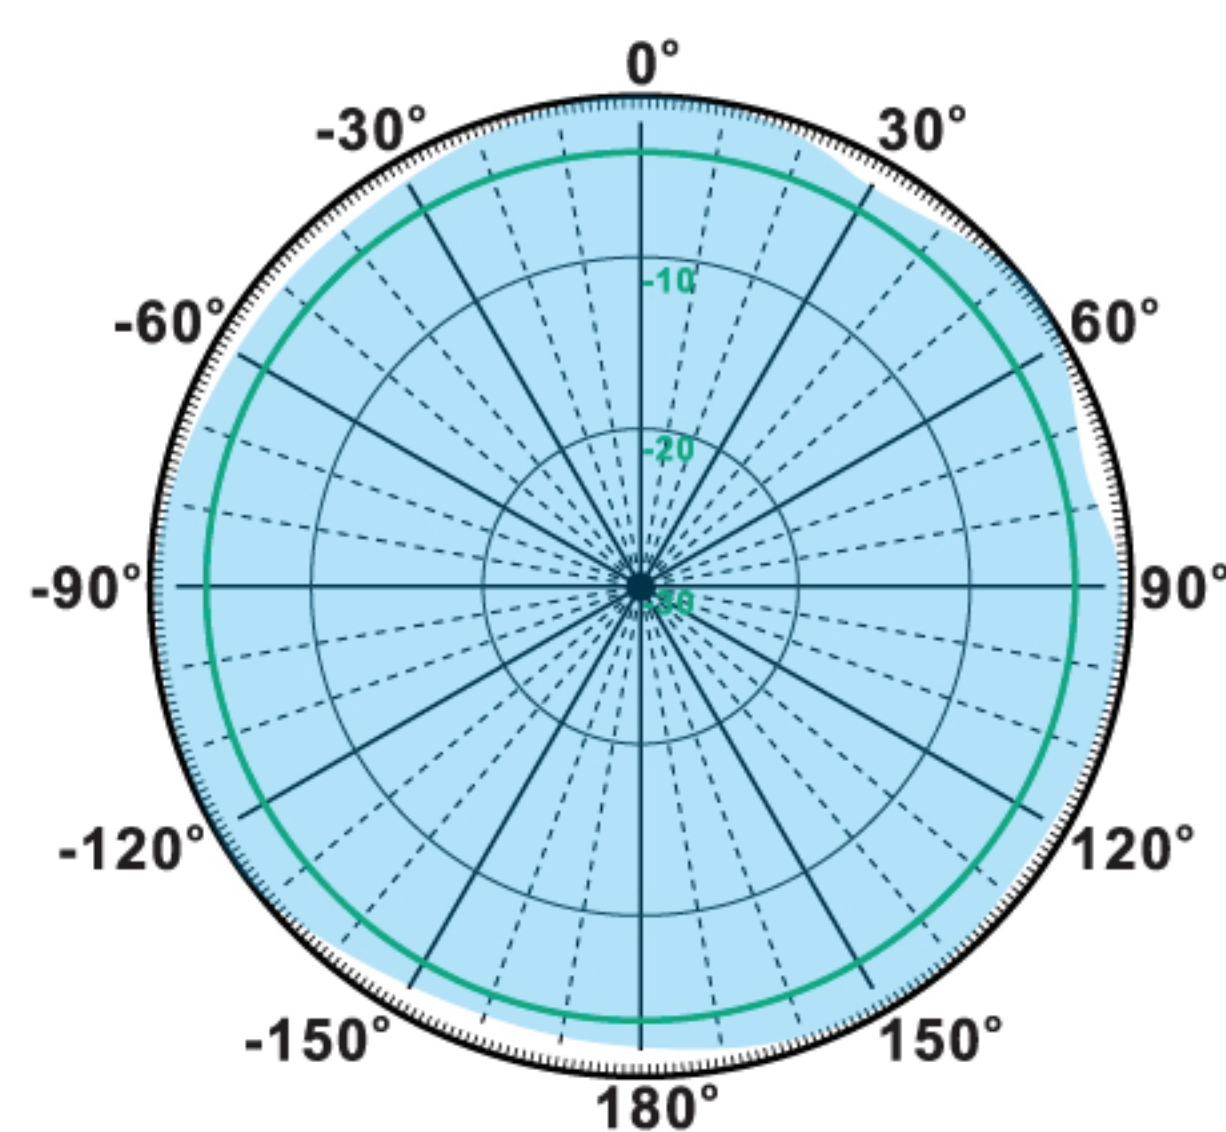

H-Plane

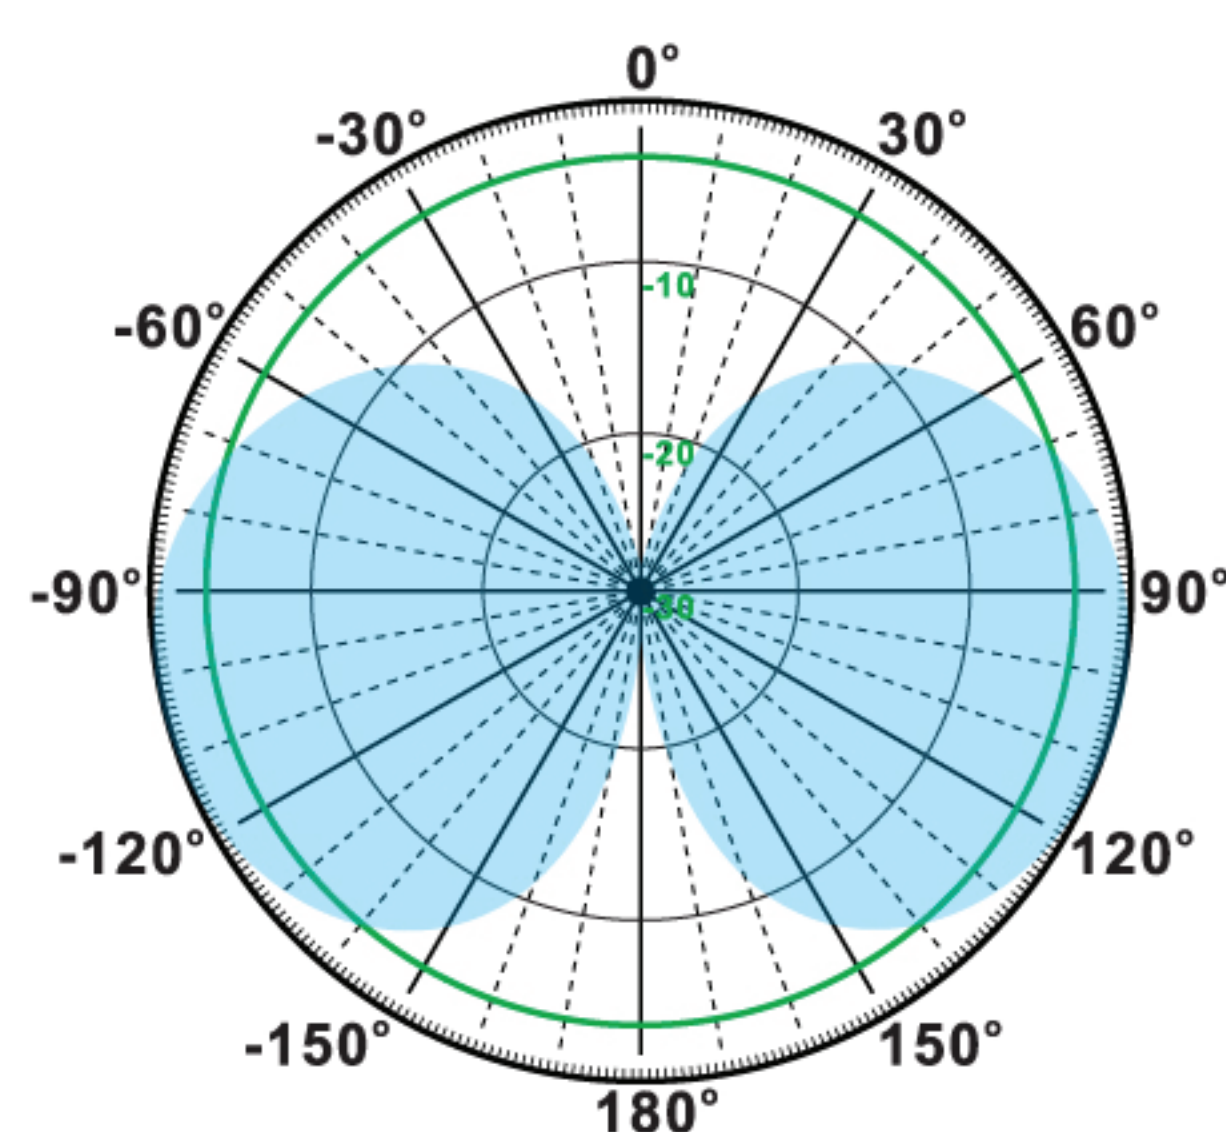

V-Plane

